


Precision **WIG/TIG Schweißbrenner**
*Welding torches / Torches de soudage /
 Antorchas de soldadura*



TBi SR 21 - 340 A DC / 100%

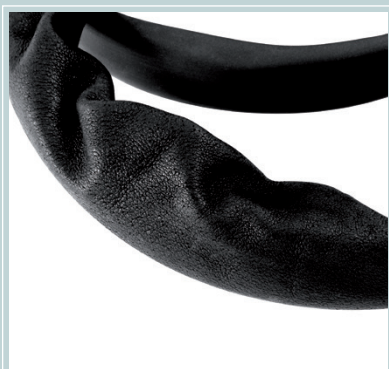

Standard: Gummi-Überzugschlauch
Option: Leder- oder Textil-Überzugschlauch


Standard: Rubber outer cover
Option: Leather or textile outer cover

Standard: Housse en caoutchouc
Option: Housse en cuir ou textile

Estándar: Funda de goma
Opción: Funda de cuero o textil

Precision

gasgekühlt / gas cooled / refroidissement par air / refrigeradas por aire

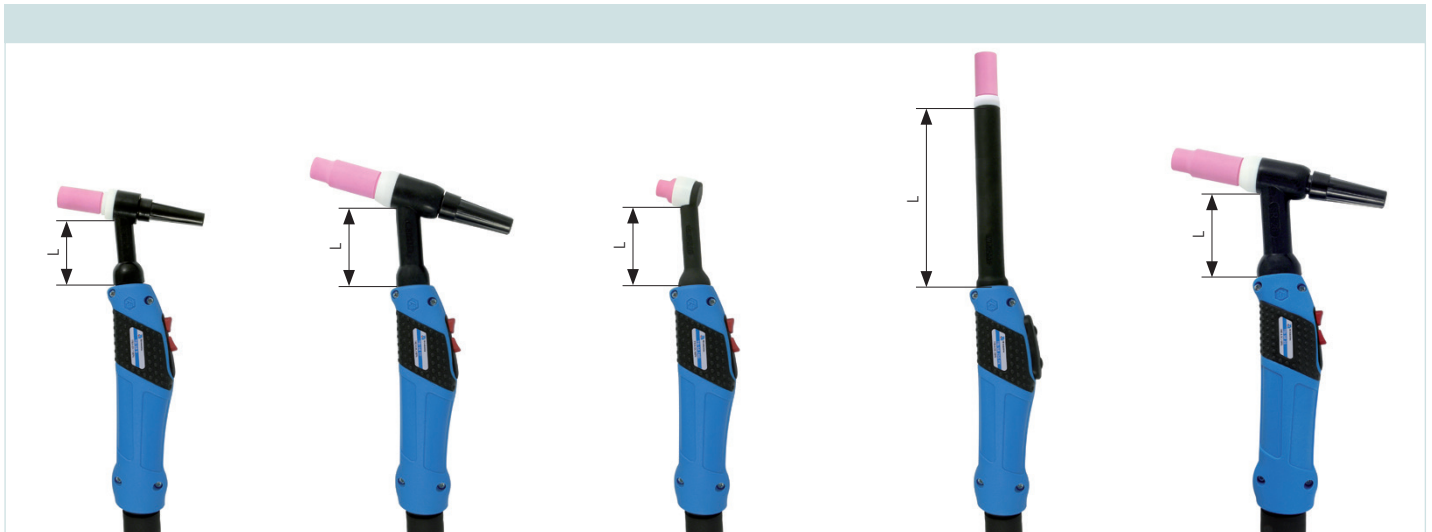

TBi SR 9 (FX)
TBi SR 9 V (FX)
60% (10 min.)
AC: 80 A
DC: 110 A
Ø 0.5-1.6 mm
L = 35 mm
(FX: 35 mm (Std.),
115 mm)

TBi SR 17 (FX)
TBi SR 17 V (FX)
60% (10 min.)
AC: 100 A
DC: 140 A
Ø 0.5-2.4 mm
L = 50 mm
(FX: 50 mm)


TBi SR 24G
60% (10 min.)
AC: 80 A
DC: 110 A
Ø 0.5-1.6 mm
L = 50 mm

TBi SR 25G FX
60% (10 min.)
AC: 80 A
DC: 110 A
Ø 0.5-2.4 mm
FX: L = 120 mm

TBi SR 26 (FX)
TBi SR 26 V (FX)
60% (10 min.)
AC: 140 A
DC: 200 A
Ø 0.5-4.0 mm
L = 50 mm
(FX: 50 mm)

Precision

wassergekühlt / water cooled / refroidissement par eau / refrigeradas por agua

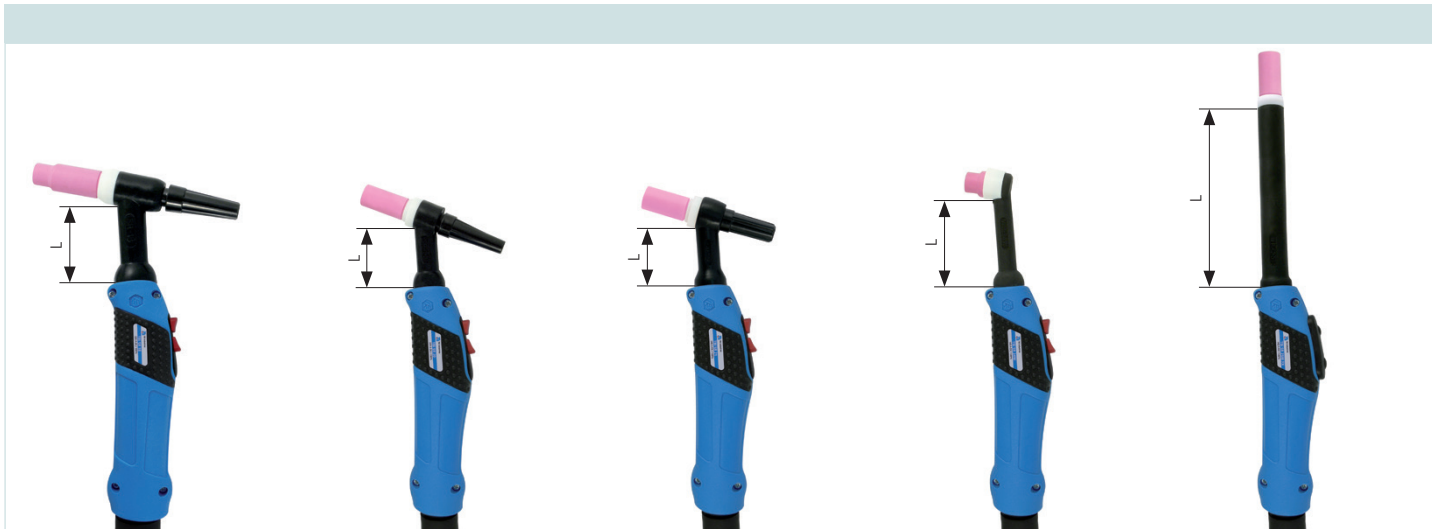

TBi SR 18 (FX)
TBi SR 18 V (FX)
100% (10 min.)
AC: 225 A
DC: 320 A
Ø 0.5-4.0 mm
L = 50 mm
(FX: 50 mm)

TBi SR 20 (FX)
TBi SR 20 V (FX)
100% (10 min.)
AC: 160 A
DC: 220 A
Ø 0.5-3.2 mm
L = 35 mm
(FX: 35 mm (Std.),
70, 90, 115 mm)

TBi SR 21 (FX)
100% (10 min.)
AC: 240 A
DC: 340 A
Ø 0.5-3.2 mm
L = 35 mm
(FX: 65 mm (Std.),
115 mm)

TBi SR 24W (FX)
100% (10 min.)
AC: 100 A
DC: 140 A
Ø 0.5-2.4 mm
L = 50 mm
(FX: 65 mm (Std.),
90, 115, 290 mm)

TBi SR 25W FX
100% (10 min.)
AC: 100 A
DC: 140 A
Ø 0.5-3.2 mm
FX: L = 120 mm (Std.),
300 mm)

Module / Modules / Les modules / Módulos

**A Doppeltaster** (Ausführung abhängig vom Brennermodell)

Double function switch (style depends on torch model) /

Double bouton (version dépendant du modèle de torche) /

Pulsador doble (el tipo depende del modelo de antorcha)

B Doppeltaster mit Poti, 10 k Ω Double function switch with poti, 10 k Ω /Double bouton et potentiomètre, 10 k Ω /Pulsador doble y potenciómetro, 10 k Ω **C Doppelhebel**

Dual levers / Double levier / Manetas dobles




TBi SR 20



TBi SR 17 V

TBi Kaltdrahtsystem / TBi cold wire supply / TBi aménagement de fil froid / TBi alimentación de hilo frío

Brenner mit Ventil / Torch with valve / Torche à valve / Antorcha con válvula

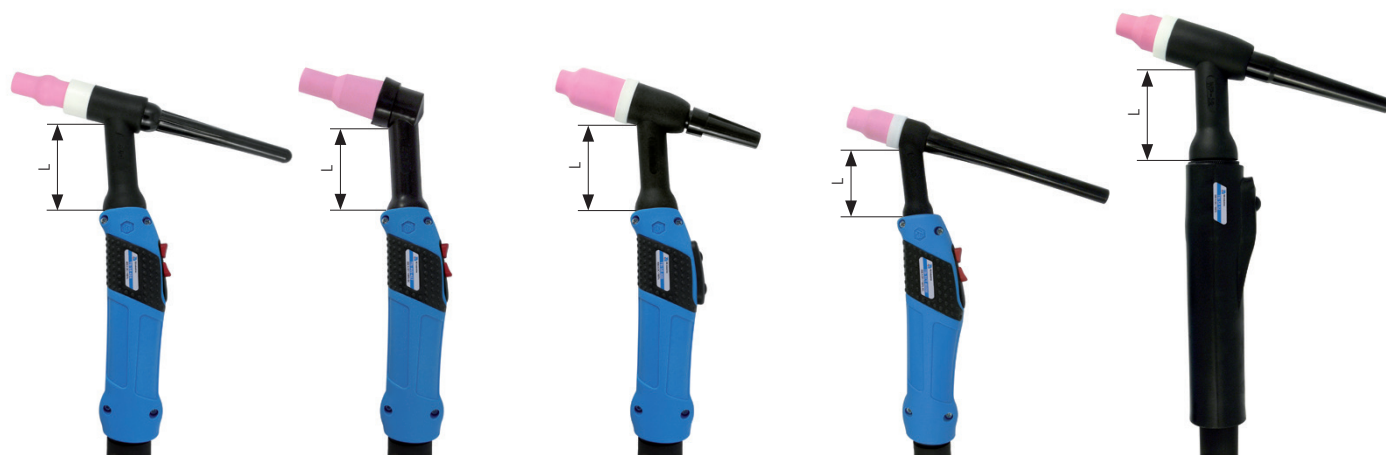**TBi AW 424**100% (10 min.)
AC: 280 A
DC: 400 A
Ø 1.0-4.0 mm
L = 55 mm**TBi AW 427**100% (10 min.)
AC: 350 A
DC: 500 A
Ø 2.4-8.0 mm
L = 55 mm**TBi SR 400**100% (10 min.)
AC: 315 A
DC: 450 A
Ø 1.0-4.8 mm
L = 50 mm**TBi XCT 400W**100% (10 min.)
AC: 315 A
DC: 450 A
Ø 2.4-4.0 mm
L = 52 mm**TBi SR 12**100% (10 min.)
AC: 350 A
DC: 500 A
Ø 2.4-6.4 mm
L = 60 mm

Ready for Tomorrow.

Alle gängigen Maschinenanschlüsse lieferbar

Torch connections for all types of welding machines / Connecteurs torches pour tous les postes à souder / Conexiones para todos los tipos de máquinas de soldadura

Gasgekühlt

Gas cooled / Refroidissement par air / Refrigeradas por aire

	M12x1 ; G1/4" ; G3/8"
	TSB 10/25 (9 mm) TSB 35/50 (13 mm)
	TSB 10/25 Mono (9 mm)
	TSB 35/50 Mono (13 mm)
	passend für / suitable for / adaptable à / apropiado para Lorch; Merkle; SAF/Oerlikon; Fronius; Dalex
	passend für / suitable for / adaptable à / apropiado para ESAB (E/M)
	Euro-GZ
	Euro-W5G

Wassergekühlt

Water cooled / Refroidissement par eau / Refrigeradas por agua

	Gas G1/4" Water G3/8" M12x1; G1/4" ; G3/8"
	TSB 35/50 (13 mm)
	passend für / suitable for / adaptable à / apropiado para Lorch; Merkle; SAF/Oerlikon; Fronius; Dalex
	passend für / suitable for / adaptable à / apropiado para ESAB (E/M)
	Euro-WZ-0
	Euro-W5W